

Tiandy



TC-C35LP

Spec: I8W/A/E/Y/M/H/2.7-13.5mm/V4.0

5MP Super Starlight Motorized IR Bullet Camera (2.7-13.5mm)

Pro Series



KEY FEATURES

- Motorized Lens 2.7-13.5mm
- Up to 3072×1728@30fps, 1920×1080@60fps
- S+265/H.265/H.264/M-JPEG
- Min. Illumination Color: 0.001Lux@F1.2
- Smart IR, IR Range: 80m
- Built in Mic&Speaker
- Support Video Analytics
- Support Face Capture
- Support Early warning
- Plugin Free
- Operating Conditions -35°~65°, 0~95% RH
- POE, IP67



Tiandy Technologies Co., Ltd.

Email: sales@tiandy.com

Tel: +86-22-58596065

Website: en.tiandy.com

Fax: +86-22-58596048



SPECIFICATIONS

Camera	
Image Sensor	1/2.8" CMOS
Signal System	PAL/NTSC
Min. Illumination	Color: 0.001Lux@ (F1.2, ACG ON), B/W: 0Lux with IR
Shutter Time	Is to 1/100,000s
Day & Night	Dual IR Cut Filter with Auto Switch
Wide Dynamic Range	120dB
Angle Adjustment	Bracket, pan 0~360°, tilt 0~75°, rotate 0~360°
Lens	
Lens Type	Motorized
Focus	2.7-13.5mm
Lens Mount	Ø14
Aperture	F1.2-F2.2, Motorized
FOV	Horizontal field of view: 94.5°-37°
Illuminator	
IR LEDs	4
IR Range	Up to 80m
Wavelength	850nm
White LEDs	N/A
Compression Standard	
Video Compression	H.265/H.265+/H.264/H.264+/M-JPEG
Video Bit Rate	32Kbps-16M/bps
Audio Compression	G.711A/G.711U/ADPCM_D/AAC_LC
Audio Bit Rate	8K-48Kbps
Image	
Max. Resolution	3072×1728
Main Stream	PAL: 25fps (3072×1728, 2560×1440, 2304×1296) 50fps (1920×1080, 1280×720) NTSC: 30fps (3072×1728, 2560×1440, 2304×1296) 60fps (1920×1080, 1280×720)
Sub Stream	PAL: 25fps (704×576, 640×360, 704×288, 352×288) NTSC: 30fps (704×480, 640×360, 704×240, 352×240)
Third Stream	PAL: 25fps (1920×1080, 1280×720, 704×576, 704×288, 352×288) NTSC: 30fps (1920×1080, 1280×720, 704×480, 704×240, 352×240)
Image Setting	Saturation, brightness, contrast, sharpness, adjustable by client software or web browser
Image Enhancement	BLC/3D DNR/HLC/Corridor Format
ROI	Support 7 fixed region of coding
OSD	16×16, 24×24, 32×32, 48×48, 64×64, 96×96, adaptable size, Letters Such as Week, Date, Time, Total 5 Regions
Picture Overlay	Yes
Privacy Mask	Yes: 4 regions
Smart Defog	Yes
Feature	
Alerts Trigger	Event Input, Event Output, Motion Detection, Mask Alarm, Disk Full, Disk R/W Error, IP Address Conflict, MAC Address Conflict, FTP Server Exception

Tiandy

Video Analytics	Tripwire, Double Tripwire, Perimeter, Object Abandon, Object Lost, Loitering, Running, Parking, Crowded, Video Abnormal, Audio Abnormal, Heatmap
Early Warning(EW)	Yes
Intelligent Coding	N/A
Intelligent Image	N/A
Intelligent Alarm	N/A
Network	
ANR	Yes, auto store video in SD card when NVR disconnected, and upload video to NVR when resumed connection (Only Support Tiandy ANR NVR)
Protocols	TCP/IP, ICMP, HTTP, HTTPS, DHCP, DNS, DDNS, MULTICAST, UPnP, FTP, IPv4, NTP, RTSP, SMTP, IGMP, QoS, Multicast
System Compatibility	ONVIF (PROFILE S/T/G/M), SDK, CGI, P2P
Remote Connection	≤7
Client	Easy7, EasyLive
Web Version	Web5
Interface	
Communication Interface	1 RJ45 10M/100M self adaptive Ethernet port
Audio	1/1: Mic in
Alarm	2/1
Reset Button	Yes
On-board storage	Built-in MicroSD card slot, up to 512 GB
General	
Firmware Version	-
Web Client Language	17 languages English, Russian, Spanish, Korean, Italian, Turkish, Simple Chinese, Traditional Chinese, Thai, French, Polish, Dutch, Hebrew, Arabic, Ukrainian, German, Vietnamese
Operating Conditions	-35°C ~ 65°C, 0 ~ 95% RH
Power Supply	DC12V±20%/PoE
Power Consumption	MAX: 8.5W (12V) MAX: 10W (PoE)
Protection	IP67
Heater	N/A
Dimensions	333×114.2×106.6mm (13.11×4.50×4.20 inch)
Weight	1.49Kg (3.26lb)



* Listed resolutions are only selectable options, it does not mean that all streams can work at their maximum resolution at the same time.

AVAILABLE MODEL

TC-C35LP SPEC: I8W/A/E/Y/M/H/2.7-13.5MM/V4.0

Tiandy

DIMENSIONS (Unit: mm)

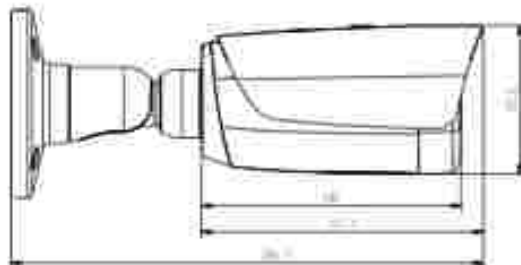

ACCESSORIES



A36
Pole Mount



A35
Corner Mount



TC-P54AM Spec: V4
Junction Box



A22
Junction Box

DISTRIBUTED BY



Tiandy Technologies Co., Ltd.

Email: sales@tiandy.com

Tel: +86-22-58596065

Website: cn.tiandy.com

Fax: +86-22-58596048